


TANKMASTER® K200 OIL SUCTION & DISCHARGE 200 PSI (Smooth Bore)

Tankmaster K200 Oil Suction and Discharge hose is recommended for the transfer of petroleum based products. The smooth bore promotes an even flow through the system. The reinforcement of multiple plies of spiral tire cords with a dual steel helix allows this hose to handle up to 200 psi working pressure. Tankmaster K200 does meet all the specifications of the USCG and RMA Type 1, Class 2 regulations. The 100 ft. lengths help cut down on connection problems. Tankmaster K200, like all dock loading hose, meets the U.S. Coast Guard requirements.



Resistance:

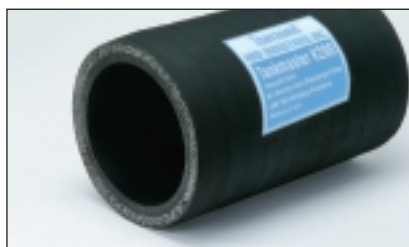

Branding:

Thermoid HBD Industries
Tankmaster K200 Oil Suction &
Discharge 200 PSI Smooth Bore
Made In USA


Cover Color:	Black
Oil Resistance:	High
Construction:	
Tube:	NBR, RMA Class A
Cover:	CR - corrugated, double pitch
Reinforcement:	Dual steel wire helix(es) spiralled between multiple plies of spiral tire cords
Flow Velocity:	50 Ft/Second maximum
Temperature Range:	-20°F to +200°F -29°C to +93°C
Packaging:	100 ft. maximum Hand built – \$250.00 minimum order per size
Couplings:	Swage only

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
11434520502▲	4	101.60	5.00	127.00	4	200	1.38	15.00	381.00	5.00	7.44
11434521502▲	6	152.40	7.31	185.74	4	200	1.38	22.00	558.80	9.30	13.84
11434523502▲	8	203.20	9.63	244.48	4	200	1.38	30.00	762.00	14.20	21.13
11434525502▲	10	254.00	11.88	301.63	6	200	1.38	36.00	914.40	20.00	29.77

▲ = Make To Order (MTO)

TANKMASTER® OIL DISCHARGE (Smooth Bore)

Use Tankmaster Oil Discharge hose in discharge applications only. This hose handles gasoline, oils and other petroleum distillates. This hose is lightweight and resistant to petroleum products with aromatic content up to 50%. The multiple plies of synthetic cord reinforcement enable this hose to operate smoothly even up to working pressures of 200 psi. The CR cover and NBR tube are resistant to abrasions, weathering and ozone. Tankmaster Oil Discharge hose meets the requirements of the U.S. Coast Guard regulations.

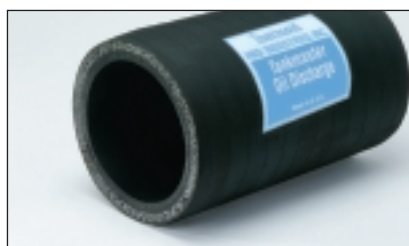

Resistance:



Branding:

Thermoid HBD Industries
Tankmaster Oil Discharge
Made In USA

Cover Color:	Black
Oil Resistance:	High
Construction:	
Tube:	NBR, RMA Class A
Cover:	CR
Reinforcement:	Multiple plies of synthetic cord
Flow Velocity:	50 Ft/Second maximum
Temperature Range:	-20°F to +200°F -29°C to +93°C
Packaging:	100 ft. maximum
Couplings:	Swaged couplings through 10" I.D. or built-in nipples through 12" I.D.

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
11434650502▲	4	101.60	4.88	123.83	4	200	1.38	n/a	n/a	2.80	4.17
11434655502▲	6	152.40	7.00	177.80	4	200	1.38	n/a	n/a	4.90	7.29
11434660502▲	8	203.20	9.31	236.54	6	200	1.38	n/a	n/a	7.70	11.46
11434665502▲	10	254.00	11.19	284.16	6	200	1.38	n/a	n/a	8.30	12.35
11434670502▲	12	304.80	13.41	340.52	6	200	1.38	n/a	n/a	13.30	19.79

▲ = Make To Order (MTO)

n/a = Not Applicable