


TRANSPORTER® WATER SUCTION & DISCHARGE

Transporter Water Suction and Discharge hose is designed for contractors and agricultural applications. This hose features an EPDM tube and cover construction which allows this hose to be smooth, tough, non-porous, heat and abrasion resistant. This construction, plus the reinforcement of a wire inserted helical wire in synthetic cord, makes this hose lightweight, flexible and easy to handle. This hose is rated at **full vacuum**.

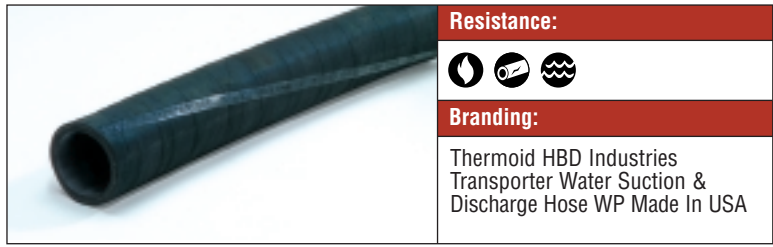

- Cover Color:** Black
- Oil Resistance:** Limited
- Construction:**
 - Tube:** EPDM
 - Cover:** EPDM
 - Reinforcement:** Synthetic cord with spiral wire helix(es) wire inserted
- Temperature Range:** -40°F to +180°F
-40°C to +82°C
- Packaging:** 100 ft. maximum

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
17834010002▲	1	25.40	1.44	36.51	2	200	1.38	2.50	63.50	0.50	0.74
17834012502▲	1-1/4	31.75	1.69	42.86	2	200	1.38	3.00	76.20	0.60	0.89
17834015002	1-1/2	38.10	1.94	49.21	2	200	1.38	4.00	101.60	0.70	1.04
17834020002	2	50.80	2.44	61.91	2	150	1.03	6.00	152.40	0.90	1.34
17834025002	2-1/2	63.50	3.00	76.20	2	150	1.03	8.50	215.90	1.30	1.93
17834030002	3	76.20	3.56	90.49	2	150	1.03	11.00	279.40	1.80	2.68
17834040002	4	101.60	4.63	117.48	2	150	1.03	14.00	355.60	2.60	3.87
17830600002	6	152.40	6.67	169.47	2	100	0.69	30.00	762.00	4.10	6.10

▲ = Make To Order (MTO)

WATER/FIRE Water Suction