


**VALUFLEX®/GS – RED**

Valuflex/GS is one of the finest multipurpose air and water hose available, anywhere. Red Valuflex provides job/color coding possibilities for safety and other considerations. Valuflex is a very economical general service air and water hose. It can be used in numerous industrial, agricultural and construction applications where oil is **not** a factor. Valuflex is easy to handle and very flexible due to its multi-spiral layers of durable reinforcing polyester yarn. Available in a wide variety of sizes, Valuflex provides constant working pressures of 150, 200, 250, or 300 psi. It has an EPDM tube and cover that resists abrasion, heat and ozone. This hose is **not** for use as a steam hose.

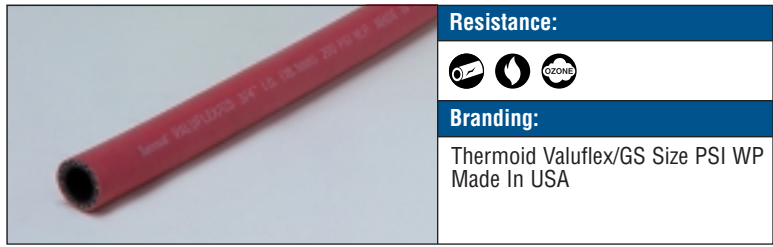

- Cover Color:** Red
- Oil Resistance:** Limited
- Construction:**
  - Tube:** EPDM
  - Cover:** EPDM
  - Reinforcement:** Spiral polyester yarn
- Temperature Range:** -40°F to +200°F  
-40°C to +93°C
- Packaging:** Reels or †50 ft. length – 1 per carton

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00114504100▲	1/4	6.35	0.49	12.45	2	150	1.03	1.50	38.10	0.09	0.13
00114504200	1/4	6.35	0.49	12.45	2	200	1.38	1.50	38.10	0.09	0.13
00114504300	1/4	6.35	0.56	14.22	4	250	1.72	1.50	38.10	0.12	0.18
00114504400	1/4	6.35	0.62	15.75	4	300	2.07	1.50	38.10	0.16	0.24
00114505200	5/16	7.94	0.58	14.73	2	200	1.38	2.00	50.80	0.12	0.18
00114505400	5/16	7.94	0.62	15.75	4	300	2.07	2.00	50.80	0.14	0.21
00114506100▲	3/8	9.53	0.68	17.27	2	150	1.03	2.25	57.15	0.16	0.24
00114506200	3/8	9.53	0.68	17.27	2	200	1.38	2.25	57.15	0.16	0.24
00114506251†	3/8	9.53	0.68	17.27	2	200	1.38	2.25	57.15	0.16	0.24
00114506300	3/8	9.53	0.69	17.46	4	250	1.72	2.25	57.15	0.17	0.25
00114506400	3/8	9.53	0.71	18.03	4	300	2.07	2.25	57.15	0.18	0.27
00114506451†	3/8	9.53	0.71	18.03	4	300	2.07	2.25	57.15	0.18	0.27
00114508100	1/2	12.70	0.81	20.64	2	150	1.03	3.00	76.20	0.20	0.30
00114508200	1/2	12.70	0.81	20.64	2	200	1.38	3.00	76.20	0.25	0.37
00114508300	1/2	12.70	0.84	21.43	4	250	1.72	3.00	76.20	0.25	0.37
00114508400	1/2	12.70	0.84	21.43	4	300	2.07	3.00	76.20	0.25	0.37
00114510100	5/8	15.88	0.93	23.62	2	150	1.03	3.75	95.25	0.24	0.36
00114510200	5/8	15.88	0.93	23.62	4	200	1.38	3.75	95.25	0.30	0.45
00114510400	5/8	15.88	1.00	25.40	4	300	2.07	3.75	95.25	0.30	0.45
00114512100	3/4	19.05	1.12	28.45	2	150	1.03	4.50	114.30	0.34	0.51
00114512151†▲	3/4	19.05	1.12	28.45	2	150	1.03	4.50	114.30	0.34	0.51
00114512200	3/4	19.05	1.15	29.21	4	200	1.38	4.50	114.30	0.38	0.57
00114512251†	3/4	19.05	1.15	29.21	4	200	1.38	4.50	114.30	0.38	0.57
00114512500	3/4	19.05	1.15	29.21	4	250	1.72	4.50	114.30	0.38	0.57
00114512550†	3/4	19.05	1.15	29.21	4	250	1.72	4.50	114.30	0.38	0.57
00114512400	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.41	0.61
00114512451†	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.41	0.61
00114516200	1	25.40	1.37	34.80	4	150	1.03	7.00	177.80	0.43	0.64
00114516300	1	25.40	1.37	34.80	4	200	1.38	7.00	177.80	0.51	0.76
00114516400	1	25.40	1.37	34.80	4	300	1.38	7.00	177.80	0.51	0.76
00114520200	1-1/4	31.75	1.75	44.45	4	200	1.38	8.75	222.25	0.81	1.21
00114524200	1-1/2	38.10	2.00	50.80	4	200	1.38	10.50	266.70	0.95	1.41
00114532200	2	50.80	2.55	64.77	4	200	1.38	14.00	355.60	1.13	1.68

▲ = Make To Order (MTO)  
† = 50 ft. length – 1 per carton

**AIR/MULTIPURPOSE**

Product information is subject to change. For full details, visit our website or contact Customer Service.

## VALUFLEX®/GS – BLACK

Valuflex/GS is one of the finest multipurpose air and water hose available, anywhere. Black Valuflex provides job/color coding possibilities for safety and other considerations. Valuflex is a very economical general service air and water hose. It can be used in numerous industrial, agricultural and construction applications where oil is **not** a factor. Valuflex is easy to handle and very flexible due to its multi-spiral layers of durable reinforcing polyester yarn. Available in a wide variety of sizes, Valuflex provides constant working pressures of 150, 200, 250 or 300 psi. It has an EPDM tube and cover that resists abrasion, heat and ozone. This hose is **not** for use as a steam hose.



### Resistance:



### Branding:

Thermoid Valuflex/GS Size PSI WP  
Made In USA

<b>Cover Color:</b>	Black
<b>Oil Resistance:</b>	Limited
<b>Construction:</b>	
<b>Tube:</b>	EPDM
<b>Cover:</b>	EPDM
<b>Reinforcement:</b>	Spiral polyester yarn
<b>Temperature Range:</b>	-40°F to +200°F -40°C to +93°C
<b>Packaging:</b>	Reels or †50 ft. length – 1 per carton


Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00114604100▲	1/4	6.35	0.49	12.45	2	150	1.03	1.50	38.10	0.08	0.12
00114604200	1/4	6.35	0.49	12.45	2	200	1.38	1.50	38.10	0.08	0.12
00114604300▲	1/4	6.35	0.56	14.22	4	250	1.72	1.50	38.10	0.12	0.18
00114604400	1/4	6.35	0.62	15.75	4	300	2.07	1.50	38.10	0.15	0.22
00114605200	5/16	7.94	0.58	14.73	2	200	1.38	2.00	50.80	0.11	0.16
00114605400	5/16	7.94	0.62	15.75	4	300	2.07	2.00	50.80	0.13	0.19
00114606100▲	3/8	9.53	0.68	17.27	2	150	1.03	2.25	57.15	0.15	0.22
00114606200	3/8	9.53	0.68	17.27	2	200	1.38	2.25	57.15	0.15	0.22
00114606300▲	3/8	9.53	0.69	17.46	4	250	1.72	2.25	57.15	0.16	0.24
00114606400	3/8	9.53	0.71	18.03	4	300	2.07	2.25	57.15	0.17	0.25
00114608100	1/2	12.70	0.81	20.64	2	150	1.03	3.00	76.20	0.19	0.28
00114608200	1/2	12.70	0.81	20.64	2	200	1.38	3.00	76.20	0.24	0.36
00114608300▲	1/2	12.70	0.84	21.43	4	250	1.72	3.00	76.20	0.24	0.36
00114608400	1/2	12.70	0.84	21.43	4	300	2.07	3.00	76.20	0.24	0.36
00114610100	5/8	15.88	0.93	23.62	2	150	1.03	3.75	95.25	0.23	0.34
00114610200	5/8	15.88	0.93	23.62	4	200	1.38	3.75	95.25	0.29	0.43
00114610400	5/8	15.88	1.00	25.40	4	300	2.07	3.75	95.25	0.29	0.43
00114612100	3/4	19.05	1.12	28.45	2	150	1.03	4.50	114.30	0.33	0.49
00114612151†▲	3/4	19.05	1.12	28.45	2	150	1.03	4.50	114.30	0.33	0.49
00114612200	3/4	19.05	1.15	29.21	4	200	1.38	4.50	114.30	0.36	0.54
00114612251†▲	3/4	19.05	1.15	29.21	4	200	1.38	4.50	114.30	0.36	0.54
00114612300▲	3/4	19.05	1.15	29.21	4	250	1.72	4.50	114.30	0.36	0.54
00114612400	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.40	0.60
00114612454†▲	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.40	0.60
00114616100	1	25.40	1.37	34.80	4	150	1.03	7.00	177.80	0.41	0.61
00114616200	1	25.40	1.37	34.80	4	200	1.38	7.00	177.80	0.49	0.73
00114616400	1	25.40	1.43	36.32	4	300	2.07	7.00	177.80	0.49	0.73
00114620200	1-1/4	31.75	1.75	44.45	4	200	1.03	8.75	222.25	0.79	1.18
00114624200	1-1/2	38.10	2.00	50.80	4	200	1.03	10.50	266.70	0.90	1.34
00114632200	2	50.80	2.55	64.77	4	200	1.03	14.00	355.60	1.08	1.61

▲ = Make To Order (MTO)

† = 50 ft. length – 1 per carton

**VALUFLEX®/GS – GREEN, YELLOW, BLUE**

Valuflex/GS is one of the finest multi-purpose air and water hose available, anywhere. Valuflex provides job/color coding possibilities for safety and other considerations. Valuflex is a very economical general service air and water hose. It can be used in numerous industrial, agricultural and construction applications where oil is **not** a factor. Valuflex is easy to handle and very flexible due to its multi-spiral layers of durable reinforcing polyester yarn. Available in a wide variety of sizes, Valuflex provides constant working pressures of 150, 200, 250 or 300 psi. It has an EPDM tube and cover that resists abrasion, heat and ozone. This hose is **not** for use as a steam hose.

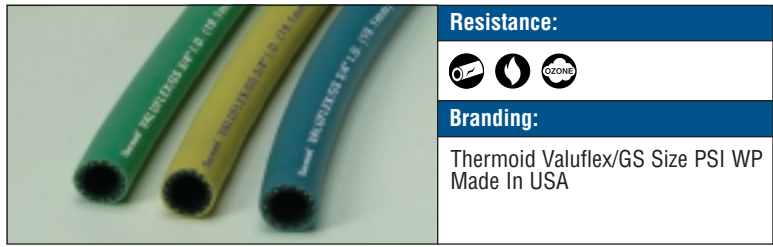

- Cover Color:** Green, Yellow or Blue
- Oil Resistance:** Limited
- Construction:**
  - Tube:** EPDM
  - Cover:** EPDM
  - Reinforcement:** Spiral polyester yarn
- Temperature Range:** -40°F to +200°F  
-40°C to +93°C
- Packaging:** Reels or †50 ft. length – 1 per carton

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
<b>Green</b>											
00114806300	3/8	9.53	0.69	17.53	4	250	1.73	2.25	57.15	0.18	0.27
00114808300	1/2	12.70	0.84	21.34	4	250	1.73	3.00	76.20	0.25	0.37
00114808400▲	1/2	12.70	0.84	21.34	4	300	2.07	3.00	76.20	0.25	0.37
00114812500	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
00114812400	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.41	0.61
00114812551†	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
00114812455†▲	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.41	0.61
00114816300▲	1	25.40	1.43	36.20	4	250	1.73	7.00	177.80	0.54	0.80
00114816400	1	25.40	1.43	36.20	4	300	2.07	7.00	177.80	0.54	0.80
<b>Yellow</b>											
00114912356▲	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
00114912351†▲	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
<b>Blue</b>											
00115008300▲	1/2	12.70	0.84	21.43	4	250	1.73	3.00	76.20	0.25	0.37
00115012300	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
00115012355†	3/4	19.05	1.15	29.21	4	250	1.73	4.50	114.30	0.37	0.55
00115016300▲	1	25.40	1.43	36.20	4	250	1.73	7.00	177.80	0.54	0.80

▲ = Make To Order (MTO)  
† = 50 ft. length – 1 per carton

AIR/MULTIPURPOSE